

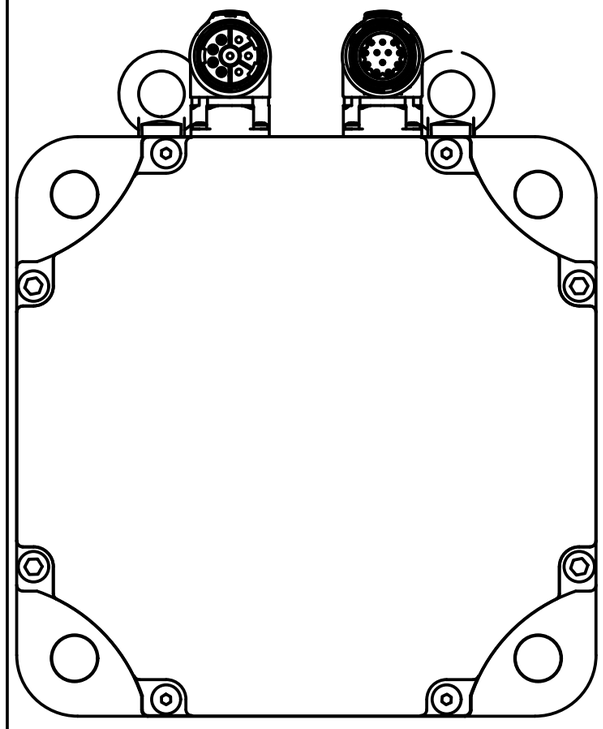


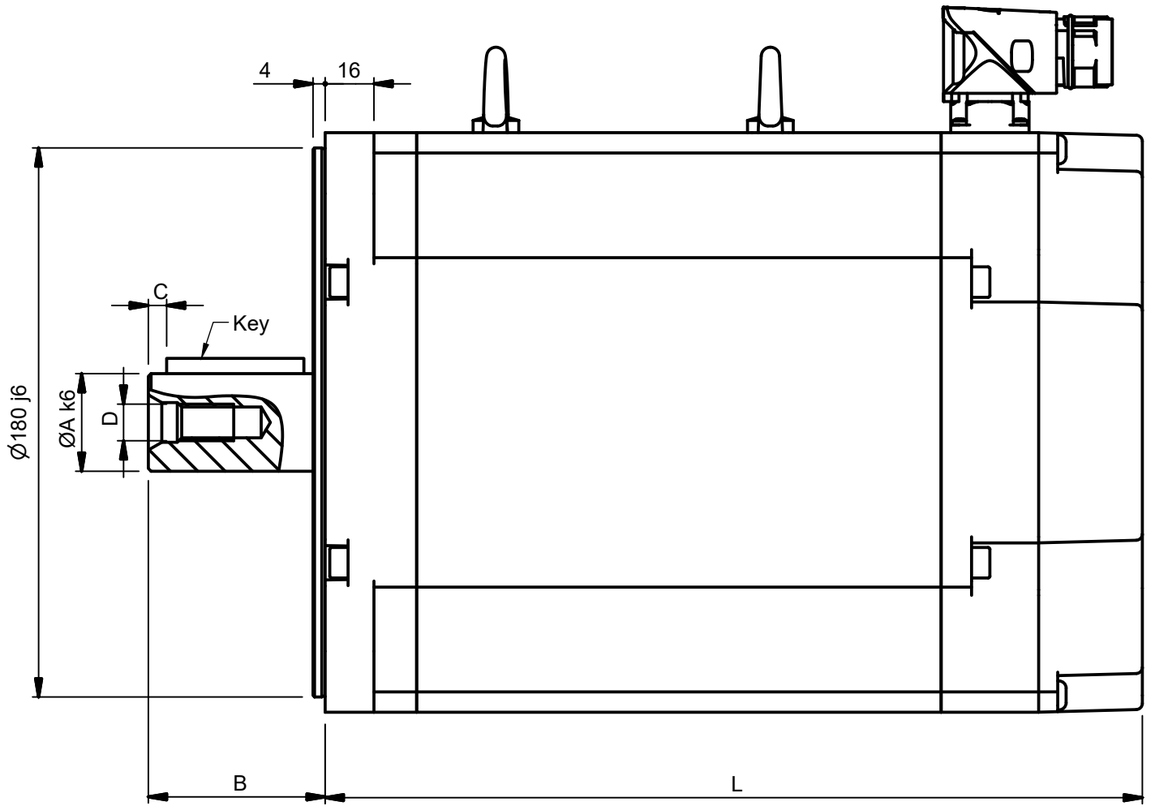

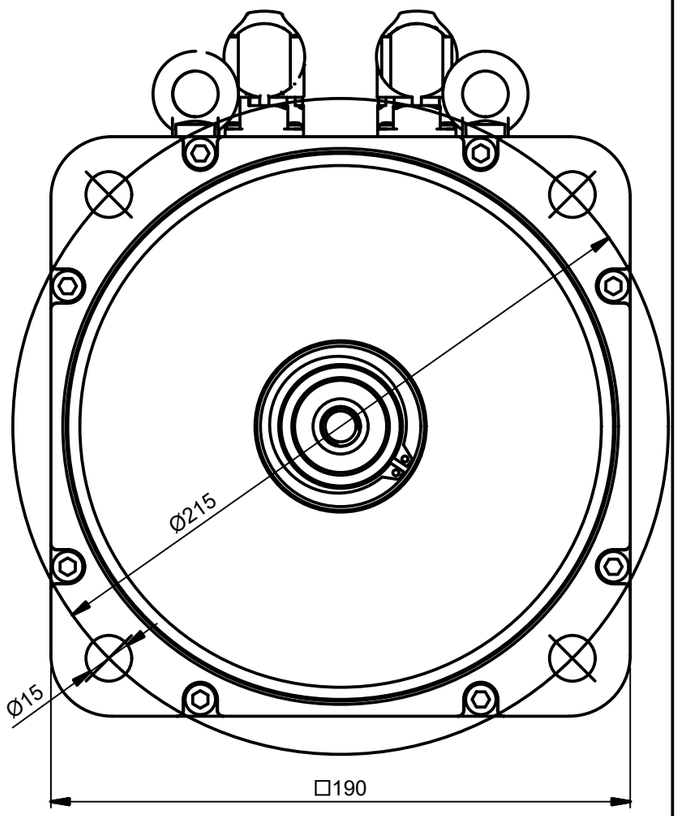

Motor with end shaft diameter 24mm:
Max allowed motor peak torque= 96,6 Nm
Max allowed radial load= 740 N
Max allowed axial load= 10% of the radial load

Motor with end shaft diameter 28mm:
Max allowed motor peak torque= 151 Nm
Max allowed radial load= 760 N
Max allowed axial load= 10% of the radial load

L = without brake L1 = with brake	L	L 1	Nm	Shaft (AxB) Key	C	D
Type	SRx50					
JHQ6-2000	223	253	20	Ø24x50 8x7x40	5	M8 DIN 332-D
JHQ6-2800	245,5	275,5	28			
JHQ7-3600	268	298	36	Ø28x58 8x7x40	9	M10 DIN 332-D
JHQ7-4200	290,5	320,5	42			

DESCRIPTION			
Motor with SRx50			
	N. DWG	REVISION	DATE
	COM0A1227	01	08/09/2015